



CHUCK

Thru-Hole Power Chuck


B-200 series

World Renowned Standard chuck


*CE correspondence




Dimensional Drawings

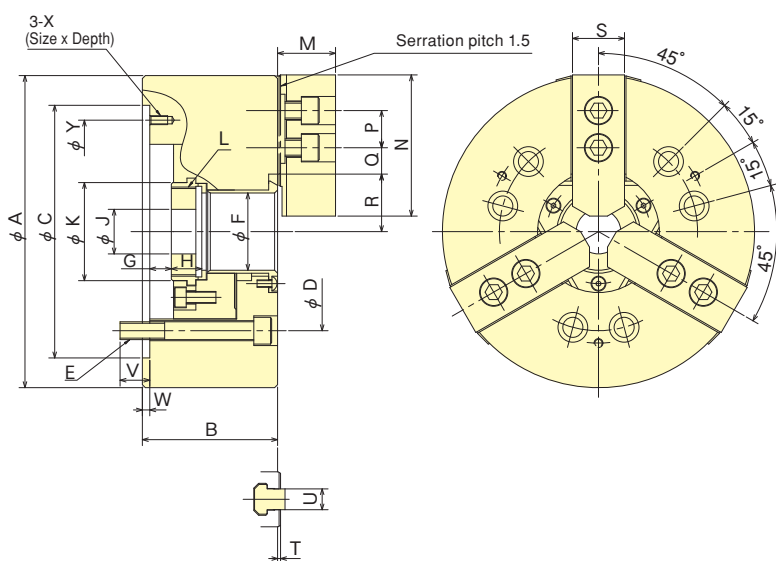

Gripping Example

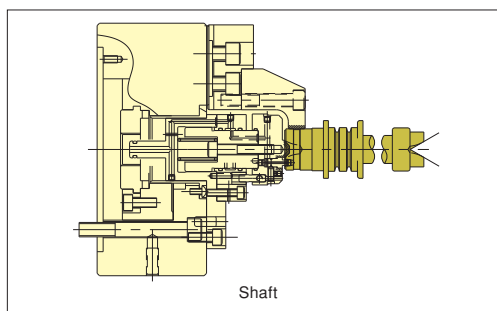

Gripping Characteristic Graphs

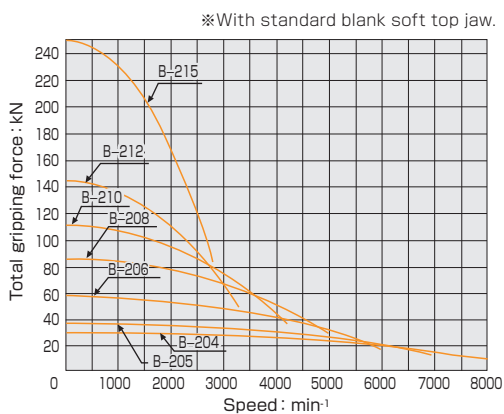

Dimensions

*Mounting Bolt P. C. D for B-204 & B-205 : 120° Pitch : 3pcs. *Blank draw nut equipped.

Model	A	B	C (H6)	D	E	F	G max.	G min.	H	J	K	L max.	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U	V	W	X	Y
B-204	110	59	85	70.6	3-M10	26	3.5	- 6.5	17.5	12	38	M32x1.5	24	49.5	14	11.25	6.75	23	20.3	23	2	10	15.5	4	-	-
B-205	135	60	110	82.6	3-M10	33	1	- 9	20	12	45	M40x1.5	26	54	14	19.75	7.75	26.5	23.8	23	2	10	15	4	-	-
B-206	169	81	140	104.8	6-M10	45	11	- 1	19	20	60	M55x2	29	66	20	22.75	9.25	32	29.25	26	2	12	16	5	M6x10	116
B-208	210	91	170	133.4	6-M12	52	14.5	- 1.5	20.5	30	66	M60x2	39	95	25	29.75	14.75	38.7	35	35	2	14	20	5	M6x12	150
B-210	254	100	220	171.4	6-M16	75	8.5	-10.5	25	45	94	M85x2	43	110	30	33.75	14.25	51	46.6	40	2	16	22	5	M8x15	190
B-212	304	110	220	171.4	6-M16	91	8	-15	28	50	108	M100x2	51	111	30	45.75	15.75	61.3	56	50	2	21	23	6	M8x15	190
B-215	381	147	300	235	6-M20	100	23	0	35	50	120	M110x2	61	135	43	54.75	20.25	70	64.7	50	2	25.5	31	6	M10x16	260

Specifications

*Max. speed is shown using actual test data. *Gripping dia./gripping range is with standard soft jaws.

Model	Thru-Hole mm	Gripping range mm (Max. Min.)	Jaw Stroke (diameter) mm	Plunger Stroke mm	Max. Draw Bar Pull Force kN	Max. Gripping Force kN	Max. Speed min⁻¹	Net Weight with Soft top jaws kg	Moment of Inertia kg·m²	Matching Cylinder	Max. pressure MPa	Matching Hard top jaw	Matching Soft top jaw
B-204	26	110 7	5.4	10	14	28.5	8000	4.0	0.007	F0933H	2.80	HB04N1	SJ04N1
B-205	33	135 12	5.4	10	17.5	36	7000	6.7	0.018	F0933H	3.43	HB04N1	SJ05N1
B-206	45	169 16	5.5	12	22	57	6000	11.9	0.058	S1246	2.8	HB06B1	SJ06L1A
B-208	52	210 13	7.4	16	34.8	86	5000	22.3	0.170	S1552	2.65	HB08A1	SJ08B1
B-210	75	254 31	8.8	19	43	111	4200	34.5	0.315	S1875	2.70	HB10A1	SJ10B1
B-212	91	304 34	10.6	23	55	144	3300	55.3	0.738	S2091	2.70	HB12N1	SJ12N1
B-215	100	381 50	10.6	23	98	249	2800	116.0	2.20	F2511H	3.30	HB15N1	SJ15N1



CHUCK

Thru-Hole Power Chuck (Direct Mount)

B-200A series



Equipped with Chuck Adaptor to suit Spindle Nose
Universally recognised standard chuck

*CE correspondence




Standard Chuck

Dimensional Drawings

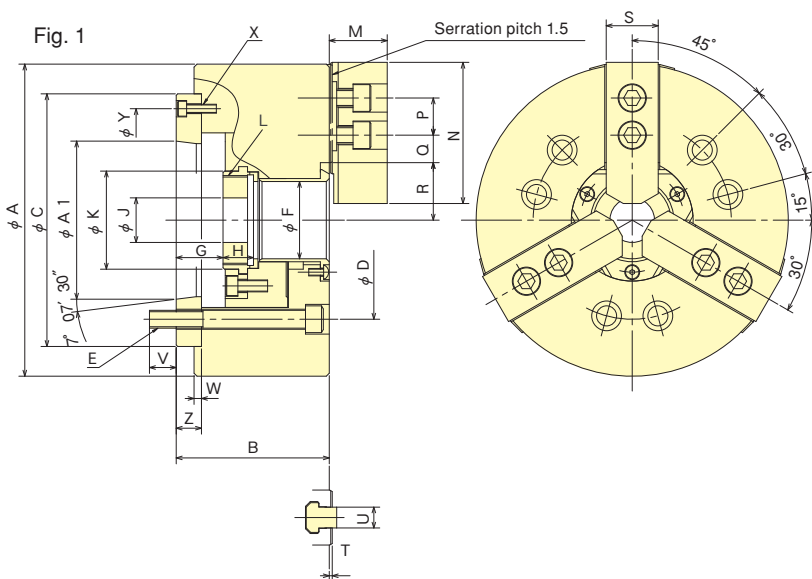


Gripping Example

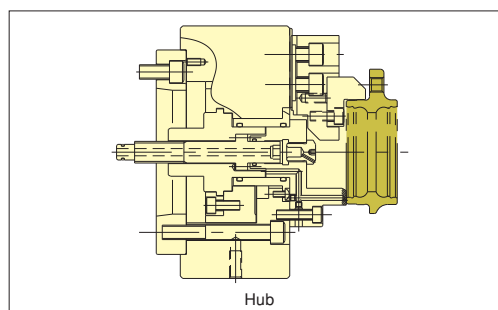

Gripping Characteristic Graphs

*With standard blank soft top jaw.

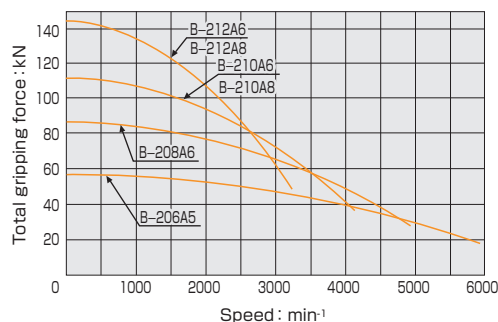

Dimensions

*B-210A6, B-212A6 are referred to in Fig.2. *Blank draw nut equipped.

Dimensions	A	B	C	D	E	F	G max.	G min.	H	J	K	L max.	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U	V	W	X	Y	Z	A1
Model B-206A5	169	91	140	104.8	6-M10	45	26	14	19	20	60	M55x2	29	66	20	22.75	9.25	32	29.25	26	2	12	16	5	3-M 6	116	15	82.563
B-208A6	210	103	170	133.4	6-M12	52	31.5	15.5	20.5	30	66	M60x2	39	95	25	29.75	14.75	38.7	35	35	2	14	18	5	3-M 6	150	17	106.375
B-210A6	254	120	220	133.4	6-M16	75	33.5	14.5	25	45	94	M85x2	43	110	30	33.75	14.25	51	46.6	40	2	16	18.5	5	6-M12	171.4	25	106.375
B-210A8	254	113	220	171.4	6-M16	75	26.5	7.5	25	45	94	M85x2	43	110	30	33.75	14.25	51	46.6	40	2	16	24	5	3-M 8	190	18	139.719
B-212A6	304	129	220	133.4	6-M16	91	33	10	28	50	108	M90x2	51	111	30	45.75	15.75	61.3	56	50	2	21	18.5	6	6-M12	171.4	25	106.375
B-212A8	304	122	220	171.4	6-M16	91	26	3	28	50	108	M100x2	51	111	30	45.75	15.75	61.3	56	50	2	21	25	6	3-M 8	190	18	139.719

Specifications

*Max. speed is shown using actual test data. *Gripping dia./gripping range is with standard soft jaws.

Specifications	Thru-Hole mm	Gripping range mm	Jaw Stroke (diameter) mm	Plunger Stroke mm	Max. Draw Bar Pull Force kN	Max. Gripping Force kN	Max. Speed min ⁻¹	Net Weight with Soft top jaws kg	Moment of inertia kg·m ²	Matching Cylinder	Max. pressure MPa	Matching Hard top jaw	Matching Soft top jaw	Spindle nose size
Model B-206A5	45	169 46	5.5	12	22	57	6000	13.7	0.063	S1246	2.8	HB06B1	SJ06L1A	A2-5
B-208A6	52	210 13	7.4	16	34.8	86	5000	23.6	0.178	S1552	2.65	HB08A1	SJ08B1	A2-6
B-210A6	75	254 31	8.8	19	43	111	4200	41.5	0.325	S1875	2.7	HB10A1	SJ10B1	A2-6
B-210A8	75	254 31	8.8	19	43	111	4200	40.0	0.323	S1875	2.7	HB10A1	SJ10B1	A2-8
B-212A6	91	304 34	10.6	23	55	144	3300	67	0.780	S2091	2.7	HB12N1	SJ12N1	A2-6
B-212A8	91	304 34	10.6	23	55	144	3300	64	0.765	S2091	2.7	HB12N1	SJ12N1	A2-8